

37°Flare flange according to SAE J518/ISO 6162
37°扩口法兰，符合SAE J518/ISO 6162




BO 3000...ORF

3000 PSI / CODE 61

Flare flange connection O-ring seal
扩口法兰组合连接O圈型密封

B

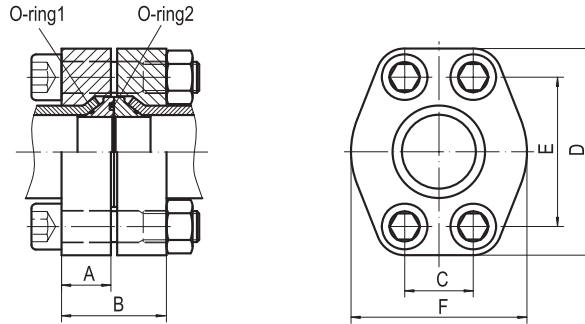

Order Example 订货示例			
Material 材质		Example 示例	Order Code 订货号
Steel , zinc plated 碳钢，镀锌		BO 3000-1-38x4.0ORF	2.05.01.0113
1.4404 不锈钢 316L		BO 3000-1-38x4.0ORF- <i>SU</i>	2.05.03.0113

Size Inch 规格	Tube O.D.xW.T. 钢管	Complete Flange Type 整套型号	Order code 订货号	A	B	C	D	E	F	O-Ring1	O-Ring2	Weight kg 重量
1/2	16x2.0	BO 3000-1/2-16x2.0ORF	2.05.01.0101	20.0	46.0	17.5	54.0	38.1	46.0	OR12x1.0	OR18.64x3.53	0.46
	18x2.0	BO 3000-1/2-18x2.0ORF	2.05.01.0102	20.0	46.0	17.5	54.0	38.1	46.0	OR14x1.0	OR18.64x3.53	0.48
	20x2.0	BO 3000-1/2-20x2.0ORF	2.05.01.0103	20.0	46.0	17.5	54.0	38.1	46.0	OR14x1.0	OR18.64x3.53	0.48
	25x2.5	BO 3000-1/2-25x2.5ORF	2.05.01.0104	20.0	46.0	17.5	54.0	38.1	46.0	OR20x1.0	OR18.64x3.53	0.48
	25x3.0	BO 3000-1/2-25x3.0ORF	2.05.01.0105	20.0	46.0	17.5	54.0	38.1	46.0	OR23x1.0	OR18.64x3.53	0.48
3/4	20x2.0	BO 3000-3/4-20x2.0ORF	2.05.01.0106	20.0	50.0	22.2	65.0	47.6	52.0	OR14x1.0	OR24.99x3.53	0.63
	20x2.5	BO 3000-3/4-20x2.5ORF	2.05.01.0107	20.0	50.0	22.2	65.0	47.6	52.0	OR16x1.0	OR24.99x3.53	0.65
	25x2.5	BO 3000-3/4-25x2.5ORF	2.05.01.0108	20.0	50.0	22.2	65.0	47.6	52.0	OR20x1.0	OR24.99x3.53	0.65
	25x3.0	BO 3000-3/4-25x3.0ORF	2.05.01.0109	20.0	50.0	22.2	65.0	47.6	52.0	OR17x1.0	OR24.99x3.53	0.65
	30x3.0	BO 3000-3/4-30x3.0ORF	2.05.01.0110	20.0	50.0	22.2	65.0	47.6	52.0	OR30x1.0	OR24.99x3.53	0.65
1	38x2.5	BO 3000-1-38x2.5ORF	2.05.01.0111	24.0	54.0	26.2	70.5	52.4	59.0	OR34x1.0	OR32.92x3.53	0.83
	38x3.0	BO 3000-1-38x3.0ORF	2.05.01.0112	24.0	54.0	26.2	70.5	52.4	59.0	OR34x1.0	OR32.92x3.53	0.81
	38x4.0	BO 3000-1-38x4.0ORF	2.05.01.0113	24.0	54.0	26.2	70.5	52.4	59.0	OR30x1.0	OR32.92x3.53	0.81
	38x5.0	BO 3000-1-38x5.0ORF	2.05.01.0114	24.0	54.0	26.2	70.5	52.4	59.0	OR28x1.0	OR32.92x3.53	0.79
1 1/4	38x3.0	BO 3000-1 1/4-38x3.0ORF	2.05.01.0115	22.0	50.0	30.2	80.5	58.7	73.0	OR34x1.0	OR32.92x3.53	1.13
	38x4.0	BO 3000-1 1/4-38x4.0ORF	2.05.01.0116	22.0	50.0	30.2	80.5	58.7	73.0	OR30x1.0	OR32.92x3.53	1.15
	38x5.0	BO 3000-1 1/4-38x5.0ORF	2.05.01.0117	22.0	50.0	30.2	80.5	58.7	73.0	OR28x1.0	OR32.92x3.53	1.03
	42x3.0	BO 3000-1 1/4-42x3.0ORF	2.05.01.0118	22.0	50.0	30.2	80.5	58.7	73.0	OR37.82x1.78	OR32.92x3.53	1.15
	42x4.0	BO 3000-1 1/4-42x4.0ORF	2.05.01.0119	22.0	50.0	30.2	80.5	58.7	73.0	OR34x1.0	OR32.92x3.53	1.13
1 1/2	42x3.0	BO 3000-1 1/2-42x3.0ORF	2.05.01.0120	25.0	56.0	35.7	94.5	69.9	83.0	OR37.82x1.78	OR47.22x3.53	1.76
	42x4.0	BO 3000-1 1/2-42x4.0ORF	2.05.01.0121	25.0	56.0	35.7	94.5	69.9	83.0	OR34x1.0	OR47.22x3.53	1.76
	50x3.0	BO 3000-1 1/2-50x3.0ORF	2.05.01.0122	25.0	56.0	35.7	94.5	69.9	83.0	OR44.17x1.78	OR47.22x3.53	1.78
	50x5.0	BO 3000-1 1/2-50x5.0ORF	2.05.01.0123	25.0	56.0	35.7	94.5	69.9	83.0	OR41x1.78	OR47.22x3.53	1.76
	50x6.0	BO 3000-1 1/2-50x6.0ORF	2.05.01.0124	25.0	56.0	35.7	94.5	69.9	83.0	OR41x1.78	OR47.22x3.53	1.78


37°Flare flange according to SAE J518/ISO 6162
37°扩口法兰, 符合SAE J518/ISO 6162



BO 3000...ORF

3000 PSI / CODE 61

Flare flange connection O-ring seal
扩口法兰组合连接O型圈密封

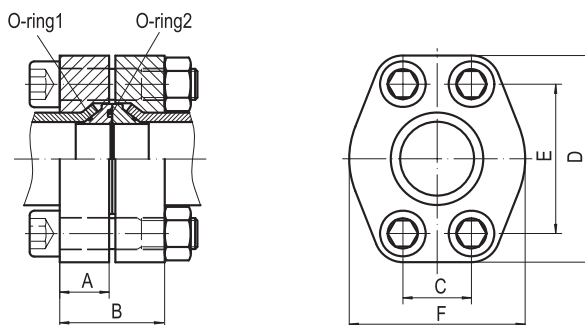

Order Example 订货示例			
Material 材质		Example 示例	Order Code 订货号
Steel , zinc plated 碳钢, 镀锌	1.4404	BO 3000-3-75x5.0ORF	2.05.01.0138
		BO 3000-3-75x5.0ORF-SU	2.05.03.0138

Size Inch 规格	Tube O.D.xW.T. 钢管	Complete Flange Type 整套型号	Order code 订货号	A	B	C	D	E	F	O-Ring1	O-Ring2	Weight kg 重量
2	50x3.0	BO 3000-2-50x3.0ORF	2.05.01.0125	33.0	70.0	42.9	101.5	77.8	97.0	OR44.17x1.78	OR56.75x3.53	2.42
	50x5.0	BO 3000-2-50x5.0ORF	2.05.01.0126	33.0	70.0	42.9	101.5	77.8	97.0	OR41x1.78	OR56.75x3.53	2.46
	50x6.0	BO 3000-2-50x6.0ORF	2.05.01.0127	33.0	70.0	42.9	101.5	77.8	97.0	OR41x1.78	OR56.75x3.53	2.53
	60x3.0	BO 3000-2-60x3.0ORF	2.05.01.0128	33.0	70.0	42.9	101.5	77.8	97.0	OR53.7x1.78	OR56.75x3.53	2.53
	60x5.0	BO 3000-2-60x5.0ORF	2.05.01.0129	33.0	70.0	42.9	101.5	77.8	97.0	OR50.52x1.78	OR56.75x3.53	2.46
	60x6.0	BO 3000-2-60x6.0ORF	2.05.01.0130	33.0	70.0	42.9	101.5	77.8	97.0	OR47.37x1.78	OR56.75x3.53	2.44
2 1/2	60x3.0	BO 3000-2 1/2-60x3.0ORF	2.05.01.0131	44.0	94.0	50.8	115.5	88.9	109.0	OR53.7x1.78	OR69.44x3.53	4.46
	60x5.0	BO 3000-2 1/2-60x5.0ORF	2.05.01.0132	44.0	94.0	50.8	115.5	88.9	109.0	OR50.52x1.78	OR69.44x3.53	4.02
	60x6.0	BO 3000-2 1/2-60x6.0ORF	2.05.01.0133	44.0	94.0	50.8	115.5	88.9	109.0	OR47.37x1.78	OR69.44x3.53	3.98
	73x7.0	BO 3000-2 1/2-73x7.0ORF	2.05.01.0134	44.0	94.0	50.8	115.5	88.9	109.0	OR63.22x1.78	OR69.44x3.53	3.96
	75x3.0	BO 3000-2 1/2-75x3.0ORF	2.05.01.0135	44.0	94.0	50.8	115.5	88.9	109.0	OR69.57x1.78	OR69.44x3.53	3.90
	75x5.0	BO 3000-2 1/2-75x5.0ORF	2.05.01.0136	44.0	94.0	50.8	115.5	88.9	109.0	OR63.22x1.78	OR69.44x3.53	3.94
3	75x3.0	BO 3000-3-75x3.0ORF	2.05.01.0137	50.0	110.0	61.9	135.0	106.4	132.0	OR69.57x1.78	OR85.32x3.53	6.50
	75x5.0	BO 3000-3-75x5.0ORF	2.05.01.0138	50.0	110.0	61.9	135.0	106.4	132.0	OR63.22x1.78	OR85.32x3.53	6.83
	90x3.5	BO 3000-3-90x3.5ORF	2.05.01.0139	50.0	110.0	61.9	135.0	106.4	132.0	OR82.27x1.78	OR85.32x3.53	6.85
	90x5.0	BO 3000-3-90x5.0ORF	2.05.01.0140	50.0	110.0	61.9	135.0	106.4	132.0	OR79x1.78	OR85.32x3.53	6.77
	90x9.0	BO 3000-3-90x9.0ORF	2.05.01.0141	50.0	110.0	61.9	135.0	106.4	132.0	OR72.75x1.78	OR85.32x3.53	6.67
	115x4.0	BO 3000-4-115x4.0ORF	2.05.01.0142	35.0	76.0	77.8	162.0	130.2	152.0	OR114.02x1.78	OR110.72x3.53	10.28
5	115x4.0	BO 3000-5-115x4.0ORF	2.05.01.0143	45.0	96.0	92.1	184.0	152.4	181.0	OR114.02x1.78	OR136.12x3.53	9.84
	125x4.0	BO 3000-5-125x4.0ORF	2.05.01.0144	45.0	96.0	92.1	184.0	152.4	181.0	OR120.37x1.78	OR136.12x3.53	9.74
	139.7x4.0	BO 3000-5-139.7x4.0ORF	2.05.01.0145	45.0	96.0	92.1	184.0	152.4	181.0	OR133.07x1.78	OR136.12x3.53	9.41


37°Flare flange according to SAE J518/ISO 6162
37°扩口法兰，符合SAE J518/ISO 6162



BO 6000...ORF


6000 PSI / CODE 62

Flare flange connection O-ring seal
扩口法兰组合连接O型圈密封

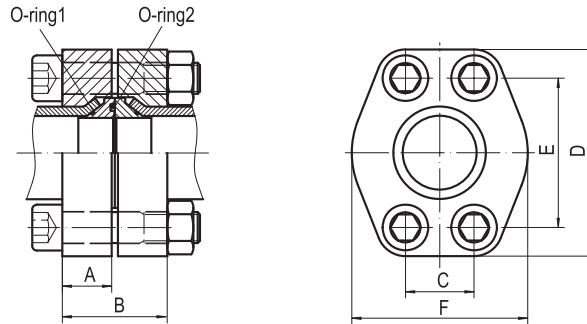

Order Example 订货示例			
Material 材质		Example 示例	Order Code 订货号
Steel , zinc plated 碳钢，镀锌		BO 6000-2-50x5.00RF	2.05.01.0330
1.4404 不锈钢 316L		BO 6000-2-50x5.00RF-SU	2.05.03.0330

Size Inch 规格	Tube O.D.xW.T. 钢管	Complete Flange Type 整套型号	Order code 订货号	A	B	C	D	E	F	O-Ring1	O-Ring2	Weight kg 重量
1/2	16x2.0	BO 6000-1/2-16x2.00RF	2.05.01.0304	20.0	46.0	18.2	54.0	40.5	46.0	OR12x1.0	OR18.64x3.53	0.57
	18x2.0	BO 6000-1/2-18x2.00RF	2.05.01.0305	20.0	46.0	18.2	54.0	40.5	46.0	OR14x1.0	OR18.64x3.53	0.57
	20x2.0	BO 6000-1/2-20x2.00RF	2.05.01.0306	20.0	46.0	18.2	54.0	40.5	46.0	OR14x1.0	OR18.64x3.53	0.55
	25x2.5	BO 6000-1/2-25x2.50RF	2.05.01.0307	20.0	46.0	18.2	54.0	40.5	46.0	OR20x1.0	OR18.64x3.53	0.55
	25x3.0	BO 6000-1/2-25x3.00RF	2.05.01.0308	20.0	46.0	18.2	54.0	40.5	46.0	OR23x1.0	OR18.64x3.53	0.50
3/4	20x2.0	BO 6000-3/4-20x2.00RF	2.05.01.0309	20.0	50.0	23.8	65.0	50.8	52.0	OR14x1.0	OR24.99x3.53	1.11
	20x2.5	BO 6000-3/4-20x2.50RF	2.05.01.0310	20.0	50.0	23.8	65.0	50.8	52.0	OR16x1.0	OR24.99x3.53	1.13
	25x2.5	BO 6000-3/4-25x2.50RF	2.05.01.0311	20.0	50.0	23.8	65.0	50.8	52.0	OR20x1.0	OR24.99x3.53	1.05
	25x3.0	BO 6000-3/4-25x3.00RF	2.05.01.0312	20.0	50.0	23.8	65.0	50.8	52.0	OR17x1.0	OR24.99x3.53	1.07
	30x3.0	BO 6000-3/4-30x3.00RF	2.05.01.0313	20.0	50.0	23.8	65.0	50.8	52.0	OR30x1.0	OR24.99x3.53	1.01
	30x4.0	BO 6000-3/4-30x4.00RF	2.05.01.0314	20.0	50.0	23.8	65.0	50.8	52.0	OR28x1.0	OR24.99x3.54	1.05
1	38x2.5	BO 6000-1-38x2.50RF	2.05.01.0315	24.0	54.0	27.8	81.0	57.2	70.0	OR34x1.0	OR32.92x3.53	1.34
	38x3.0	BO 6000-1-38x3.00RF	2.05.01.0316	24.0	54.0	27.8	81.0	57.2	70.0	OR34x1.0	OR32.92x3.53	1.32
	38x4.0	BO 6000-1-38x4.00RF	2.05.01.0317	24.0	54.0	27.8	81.0	57.2	70.0	OR30x1.0	OR32.92x3.53	1.32
	38x5.0	BO 6000-1-38x5.00RF	2.05.01.0318	24.0	54.0	27.8	81.0	57.2	70.0	OR28x1.0	OR32.92x3.53	1.30
1 1/4	38x3.0	BO 6000-1 1/4-38x3.00RF	2.05.01.0319	30.0	66.0	31.8	95.0	66.6	78.0	OR34x1.0	OR32.92x3.53	2.14
	38x4.0	BO 6000-1 1/4-38x4.00RF	2.05.01.0320	30.0	66.0	31.8	95.0	66.6	78.0	OR30x1.0	OR32.92x3.53	2.16
	38x5.0	BO 6000-1 1/4-38x5.00RF	2.05.01.0321	30.0	66.0	31.8	95.0	66.6	78.0	OR28x1.0	OR32.92x3.53	2.14
	42x3.0	BO 6000-1 1/4-42x3.00RF	2.05.01.0322	30.0	66.0	31.8	95.0	66.6	78.0	OR37.82x1.78	OR32.92x3.53	2.16
	42x4.0	BO 6000-1 1/4-42x4.00RF	2.05.01.0323	30.0	66.0	31.8	95.0	66.6	78.0	OR34x1.0	OR32.92x3.53	2.14
1 1/2	42x3.0	BO 6000-1 1/2-42x3.00RF	2.05.01.0324	35.0	78.0	36.5	112.0	79.3	95.0	OR37.82x1.78	OR47.22x3.53	3.63
	42x4.0	BO 6000-1 1/2-42x4.00RF	2.05.01.0325	35.0	78.0	36.5	112.0	79.3	95.0	OR34x1.0	OR47.22x3.53	3.63
	50x3.0	BO 6000-1 1/2-50x3.00RF	2.05.01.0326	35.0	78.0	36.5	112.0	79.3	95.0	OR44.17x1.78	OR47.22x3.53	3.65
	50x5.0	BO 6000-1 1/2-50x5.00RF	2.05.01.0327	35.0	78.0	36.5	112.0	79.3	95.0	OR41x1.78	OR47.22x3.53	3.63
	50x6.0	BO 6000-1 1/2-50x6.00RF	2.05.01.0328	35.0	78.0	36.5	112.0	79.3	95.0	OR41x1.78	OR47.22x3.53	3.65
2	50x3.0	BO 6000-2-50x3.00RF	2.05.01.0329	40.0	86.0	44.5	133.5	96.8	114.0	OR44.17x1.78	OR56.75x3.53	5.59
	50x5.0	BO 6000-2-50x5.00RF	2.05.01.0330	40.0	86.0	44.5	133.5	96.8	114.0	OR41x1.78	OR56.75x3.53	5.63
	50x6.0	BO 6000-2-50x6.00RF	2.05.01.0331	40.0	86.0	44.5	133.5	96.8	114.0	OR41x1.78	OR56.75x3.53	5.69
	60x3.0	BO 6000-2-60x3.00RF	2.05.01.0332	40.0	86.0	44.5	133.5	96.8	114.0	OR53.7x1.78	OR56.75x3.53	5.69
	60x5.0	BO 6000-2-60x5.00RF	2.05.01.0333	40.0	86.0	44.5	133.5	96.8	114.0	OR50.52x1.78	OR56.75x3.53	5.63
	60x6.0	BO 6000-2-60x6.00RF	2.05.01.0334	40.0	86.0	44.5	133.5	96.8	114.0	OR47.37x1.78	OR56.75x3.53	5.61

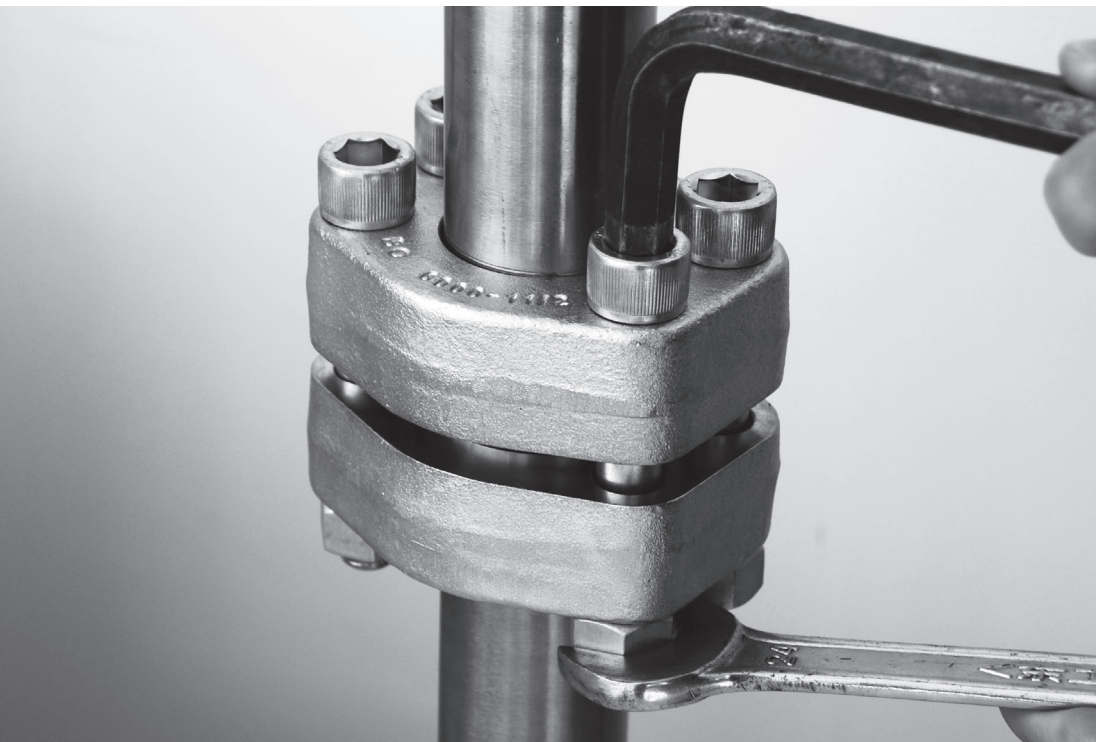

Installation
装配说明

37° flared flanges
37° 扩口法兰


According to
符合

SAE J518 / ISO 6162
ISO 6164

- ◎ Tube selection
- ◎ Tube length determination
- ◎ Cut tube
- ◎ Proper deburring and cleaning
- ◎ Slide the flange onto the tube
- ◎ Flare the tube
- ◎ Check the flared tube
- ◎ O-ring is installed
- ◎ Fit insert cone
- ◎ Grease seal
- ◎ Tighten the bolts

- ◎ 选择管子
- ◎ 确定管子的长度
- ◎ 切割
- ◎ 去毛刺与清洁
- ◎ 预装法兰
- ◎ 给管子扩口
- ◎ 检查扩口管
- ◎ 安装密封圈
- ◎ 安装中间体
- ◎ 润滑密封件
- ◎ 拧紧螺栓


Tube selection
选择管子

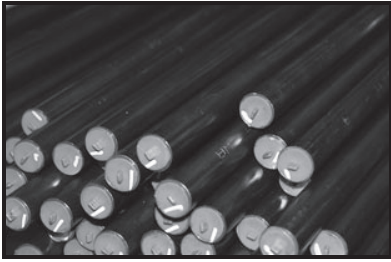

A tube grade suitable for cold-bending and flaring is to be used. We recommend the use of seamless precision steel, material St 37.4/St 52.4/ANSI 316L. Tolerances of tube outside and inside deameter to DIN 2391C (EN 10305). Calculated pressure according to DIN 2413.

应使用适合冷弯和扩口的管子等级，建议使用无缝精密钢管，材料 St 37.4/St 52.4/ANSI 316L。管子外径和内径公差符合DIN 2391C（EN 10305）。计算压力符合DIN 2413。

Tube lengh determination
确定管子的长度

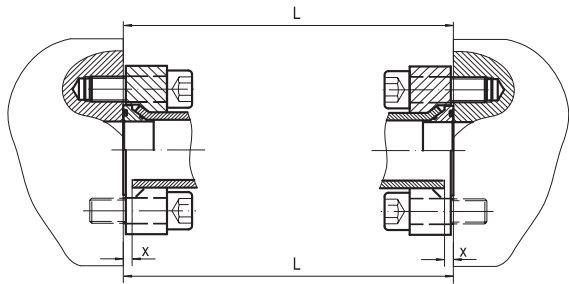

The tube length is determined by measuring the distance between the fittings (L). Dimension X must be subtracted for each tube connection.



测量两个接头中间的距离（L），确定管子的长度。每处管子连接必须减去尺寸X。

Size	Tube	X
Inch	O.D.xW.T.	mm
规格	钢管	
1/2	16x2.0	10.0
	18x2.0	11.0
	20x2.0	9.0
	25x2.5	9.0
	25x3.0	9.0
3/4	20x2.0	12.0
	20x2.5	12.0
	25x2.5	9.0
	25x3.0	10.0
	30x3.0	9.0
1	30x4.0	9.0
	38x2.5	10.0
	38x3.0	10.0
	38x4.0	10.0
	38x5.0	10.0

Size	Tube	X
Inch	O.D.xW.T.	mm
规格	钢管	
1 1/4	38x3.0	9.0
	38x4.0	9.0
	38x5.0	9.0
	42x3.0	11.0
	42x4.0	11.0
1 1/2	42x3.0	13.0
	42x4.0	13.0
	50x3.0	11.0
	50x5.0	11.0
	50x6.0	11.0
2	50x3.0	11.0
	50x5.0	11.0
	50x6.0	11.0
	60x3.0	11.0
	60x5.0	11.0
	60x6.0	11.0

Size	Tube	X
Inch	O.D.xW.T.	mm
规格	钢管	
2 1/2	60x3.0	12.0
	60x5.0	12.0
	60x6.0	12.0
	73x7.0	12.0
	75x3.0	13.0
3	75x5.0	13.0
	75x3.0	13.0
	75x5.0	16.0
	90x3.5	14.0
	90x5.0	14.0
4	90x9.0	14.0
	115x4.0	15.0
	115x4.0	15.0
	125x4.0	15.0
	140x4.5	16.0

Cut tube 切割管子

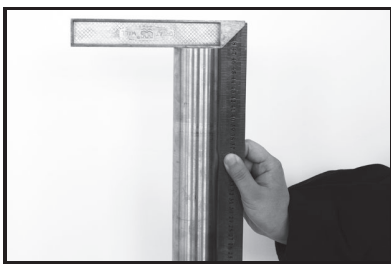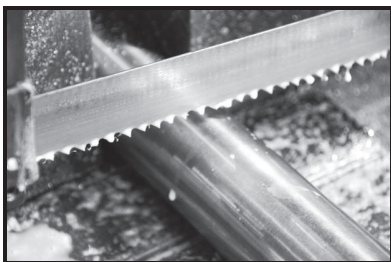

cut made by the tube manufacturer (delivery-related source of faults). Saw the tube off at right-angles, an angular deviation of $1/2^\circ$ relative to the tube axis is permissible. Do not use pipe cutters or cutting-off wheels as they cause severe burring and inclined cuts. Use a sawing machine/sawing device.

Important:

Form errors at the tube end, such as angular saw-cuts or inadequately deburred tubes, reduce the service life and the sealing capacity of the connection.

在管子制造商所做的分切处至少10mm处锯下（避免供货缺陷）。按直角锯下管子，相对于管子轴线允许有 $1/2^\circ$ 的角度偏差。请勿使用切管器或切割轮，因为会导致严重的毛刺和偏差。请使用锯机/锯具。

重要事项:

锯偏或去毛刺不当等管端形状错误会缩短连接的使用寿命和密封性能。

Proper deburring and cleaning 去毛刺与清洁



Deburr inside and out (max. $0.2 \times 45^\circ$) and clean (Depress the trigger to fire the projectile, shoot through at least 2 projectiles).

去除内外毛刺（最大 $0.2 \times 45^\circ$ ）并清洁。（使用射弹清洁枪，至少射击2枚清洁弹）。


Slide the flange onto the tube 预装法兰



Slide the flange onto the tube. Also install sleeve if have.

将法兰安装到钢管上，如果有衬套也要安装到钢管上。


Flare the tube
给管子扩口

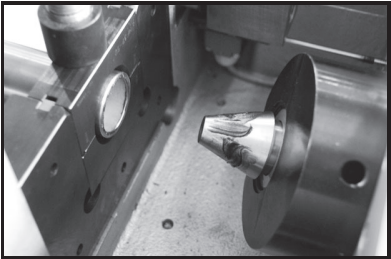

Lubricate flanging pin, then flare the tube end with the flaring machine. The flare must be at right angles to the tube axis and concentric with the tube. Irregular and eccentric flares point to defective tools or operating errors. Perfect flaring is the prerequisite to a long service life of the connection.

润滑扩口锥，然后使用扩口机进行扩口。扩口机必须与管子轴线成直角，与管子同心。扩口不规则和偏心是工具缺陷或操作失误造成的。扩口无缺陷是延长连接使用寿命的前提条件。

Check the flared tube
检查扩口管

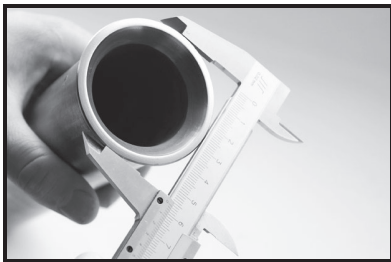

Verify the dimensional accuracy of diameter Da of the flared tube, and check for any impurities. Please refer to the tables for the respective dimensions.

检查扩口管直径Da的尺寸精度，并检查有无杂质。有关尺寸，请参见表格。

Size	Tube	Da
Inch	O.D.xW.T.	± 1mm
规格	钢管	
1/2	16x2.0	21.0
	18x2.0	23.5
	20x2.0	26.0
	25x2.5	30.5
	25x3.0	30.5
3/4	20x2.0	26.0
	20x2.5	26.0
	25x2.5	30.5
	25x3.0	30.5
	30x3.0	36.5
1	30x4.0	36.5
	38x2.5	43.0
	38x3.0	43.0
	38x4.0	43.0
	38x5.0	43.0

Size	Tube	Da
Inch	O.D.xW.T.	± 1mm
规格	钢管	
1 1/4	38x3.0	43.0
	38x4.0	43.0
	38x5.0	43.0
	42x3.0	48.0
	42x4.0	48.0
1 1/2	42x3.0	48.0
	42x4.0	48.0
	50x3.0	58.0
	50x5.0	58.0
	50x6.0	58.0
2	50x3.0	58.0
	50x5.0	58.0
	50x6.0	58.0
	60x3.0	68.0
	60x5.0	68.0

Size	Tube	Da
Inch	O.D.xW.T.	± 1mm
规格	钢管	
2 1/2	60x3.0	68.0
	60x5.0	68.0
	60x6.0	68.0
	73x7.0	82.0
	75x3.0	83.0
3	75x5.0	83.0
	75x3.0	83.0
	75x5.0	83.0
	90x3.5	100.0
	90x5.0	100.0
4	90x9.0	103.0
	115x4.0	125.0
	115x4.0	125.0
	125x4.0	130.0
	140x4.5	148.0

O-ring is installed
安装密封圈



The lubricated O-ring is installed carefully into its groove. The metallic seal faces of the cone are inspected and also the O-ring is checked so that no damage has occurred during installation.

将润滑后的O型圈安装到中间体的锥面上。仔细检查O型圈的位置，避免在安装中间体过程中发生损坏。

Fit insert cone 安装中间体



The insert cone is hammered in with plastic hammer (if needed).

用橡胶锤安装中间体（如果需要）。

B


Grease seal 润滑密封件



The dowty seal is greased before installation.


安装前润滑密封件。

Tighten the bolts 拧紧螺栓

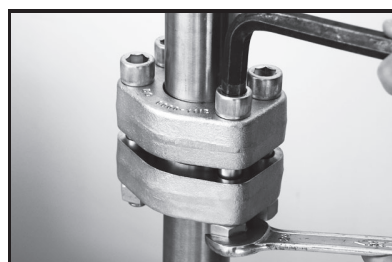

The bolts (nuts) must be tightened according to torque (see below). Path-based tightening is not permissible! Tighten the screws in cross-over fashion (1-2-3-4) and in several torque steps until the maximum torque is reached!

必须用规定的扭矩（见下表）拧紧螺栓（螺母）。不允许顺次拧紧！应以交叉方式（1-2-3-4）分几步拧紧螺栓，直到达到最大扭矩。



Flang Size 法兰规格	bolt 螺栓	Torque 扭矩
3000 PSI		Nm
1/2"	M8	20
3/4"	M10	28
1"	M10	45
1.1/4"	M10	50
1.1/2"	M12	75
2"	M12	75
2.1/2"	M12	110
3"	M16	190
4"	M16	90
5"	M16	130

Flang Size 法兰规格	bolt 螺栓	Torque 扭矩
6000 PSI		Nm
1/2"	M8	20
3/4"	M10	34
1"	M12	75
1.1/4"	M14	120
1.1/2"	M16	180
2"	M20	230

Flang Size 法兰规格	bolt 螺栓	Torque 扭矩
ISO 6164		Nm
2"	M16	200
2.1/2"	M20	280
3"	M24	460